

MU Machine Unit

Features

- ✓ Compact Designed to IP65/IP67 Standards
- ✓ 900MHz Operation
- ✓ Designed to ICS 8 NEMA Crane Specification
- ✓ 8 DIP Switches Allow for Configurability

The MU Machine Unit is a low cost machine-mounted unit intended for use on industrial systems. The MU is self-contained and prefigured providing a no-touch solution. The unit is available in 900MHz for maximum flexibility. The MU will accept control commands from HH2S and MCB varieties in the product family.

The MU can be mounted by utilizing the included mounting feet. The sturdy enclosure allows the MU to operate worry free in harsh weather conditions. A single pre-wired number-keyed 25-wire-fed cable is integral to the unit that allows easy connection to the controlled devices.



Specifications

Power

Operating Voltage 110 to 220VAC @ 50-60Hz
7 to 36VDC
10 to 28VAC @ 50-60Hz

Operating Power 0.35A

Environment

Operating Temp -40°C to 70°C (-40°F to 158°F)

Storage Temp -40°C to 80°C (-40°F to 176°F)

Humidity 0–95% non-condensing

Enclosure

Dimensions 8.327" x 6.358" x 3.937"
(211.50mm x 161.50mm x 100mm)

Durability NEMA 1, 2, 4, 4X
IP65/IP67

Mounting Four wall mounting brackets and
Four M4 x 10mm LG. self-tapping
screws

Indicator (LED)

Green Used during Association

Radio

Frequency (MHz) 906-924

Power 100mW

License License Free

Antenna External (RP – TNC)

Safety Circuit

Two (Series) Type Form A


Contact Rating 8A Max. @ 250VAC

Control Relays

Sixteen Type Form A

Contact Rating 8A Max. @ 250VAC

MU Machine Unit

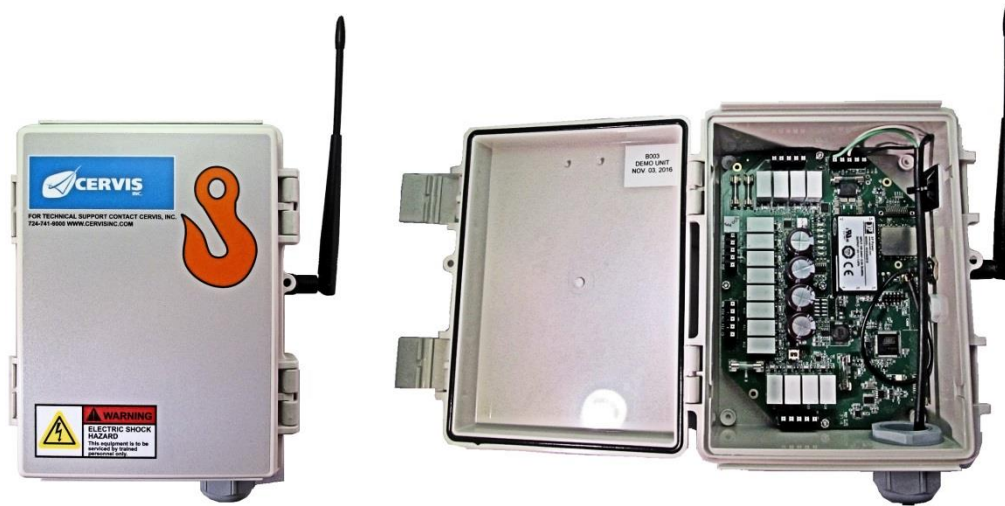


25-Lead Wiring Harness Individual Wire Assignments

Wire	Function	Wire	Function	Wire	Name	Wire	Name
1	Input Line	7	Bank 1 Common	14	K10	21	K16
2	Input Neutral	8	Bank 2 Common	15	K11	22	Bank 4 Common
Green	Input Earth	9	K5	16	K12	23	x
3	K1	10	K6	17	Bank 3 Common	24	x
4	K2	11	K7	18	Horn/Light NO		
5	K2	12	K8	19	Horn/Light NC		
6	K4	13	K9	20	MLC NO		

16-System Relays Schematic Diagram

The sixteen system relays are divided into four groups of four relays each; K1 through K4, K5 through K8, K9 through K12, and K13 through K16. Groups 1 through 3 perform related functions, group 4 contains the MLC Safety Circuit, and each group has a shared independent fused bus.

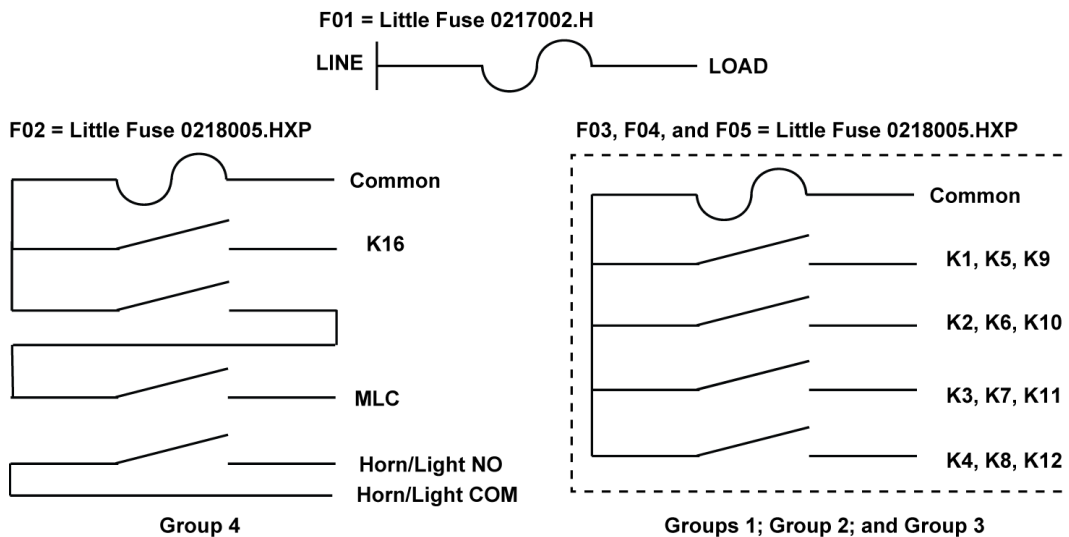

DIP Switch Configurations

The MU utilizes 8 DIP switches to allow for configuration of A/B cycling sequences, configuring relays for 4-wire control systems, configuration of Auxiliary Relay A, configuration of Auxiliary Relay B, mapping of button 9 and button 10, configuration of Relay 16, and button mapping for the Auxiliary Relay.

1	2	3	4	5	6	7	8
Mode			A/B CFG	AUX M/L	Future Use		

Mode - Sets the MU operation mode:

- 0 0 0 = 3-Motion. BR/TR/Hoist 3-Wire. A/B cycling (Default).
- 0 0 1 = 3-Motion. BR/TR/Hoist 3-Wire. A/B Independent.
- 0 1 0 = 3-Motion. BR/TR 3-Wire, Hoist 4-Wire. A/B Cycling. No Aux.
- 0 1 1 = 3-Motion. BR/TR 3-Wire, Hoist 4-Wire. A/B independent. No Aux.
- 1 0 0 = 3-Motion. BR/TR/Hoist 4-Wire. No A/B. No Aux.
- 1 0 1 = 4-Motion. BR/TR/Hoist 4th 3-Wire. No A/B. No Aux.
- 1 1 0 = Reserved
- 1 1 1 = Reserved

A/B Configuration (CFG) when Mode = 0 0 0

- 0 = A, B, Both, A, B, Both (Default).
- 1 = A, B, OFF, A, B, Off

A/B Configuration (CFG) when Mode = 0 0 1

- 0 = A and B momentary outputs.
- 1 = A and B latching outputs.

Aux M/L - Configures the Aux Relay only when Mode = 0 0 X

- 0 = Momentary (Default).
- 1 = Latching.