

HH2S-9XW SERIES

WARRIOR TRANSMITTER

900MHz @ 100mW

Channel-Hopping DSSS ■ FCC & Industry Canada License-Free ■ Internal Antenna

POWER

OPERATING VOLTAGE

+2.1V TO +3.2V

BATTERIES

TWO "AAA" 1.5V ALKALINE

LOW BATTERY WARNING

~2.1V – BATTERIES SHOULD BE IMMEDIATELY REPLACED

LOW BATTERY SHUTDOWN

<2.0V – BATTERIES MUST BE REPLACED TO OPERATE

CONTROLS

PUSHBUTTONS

EIGHT OR TEN TWO-STEP

LEDs (all red)

FOUR (RED)■ WIRELESS COMMUNICATIONS
(TRANSMIT/RECEIVE)

■ BATTERY STATUS

■ A SELECTED WHEN LIT

■ B SELECTED WHEN LIT

ENVIRONMENT

OPERATING TEMPERATURE



-4°F TO 131°F (-20°C TO 55°C)

STORAGE TEMPERATURE

-4°F TO 185°F (-20°C TO 85°C)

HUMIDITY

0 TO 95% NON-CONDENSING

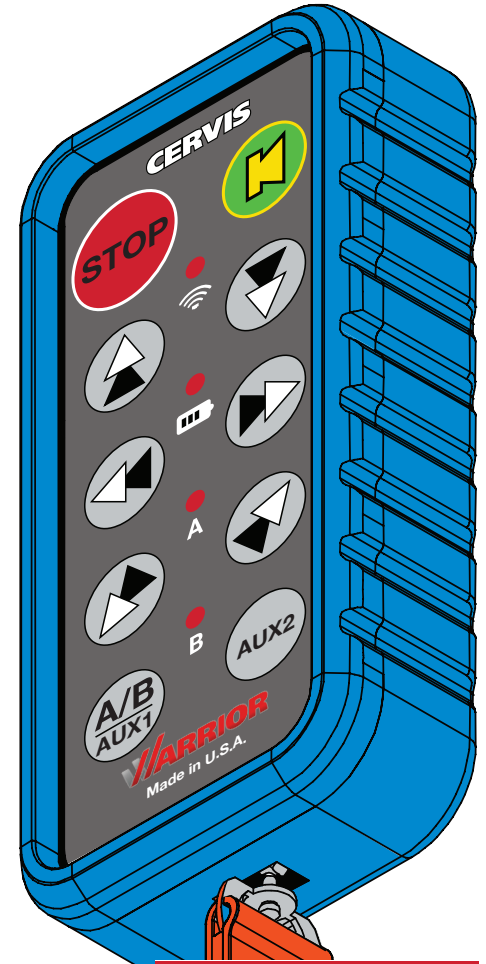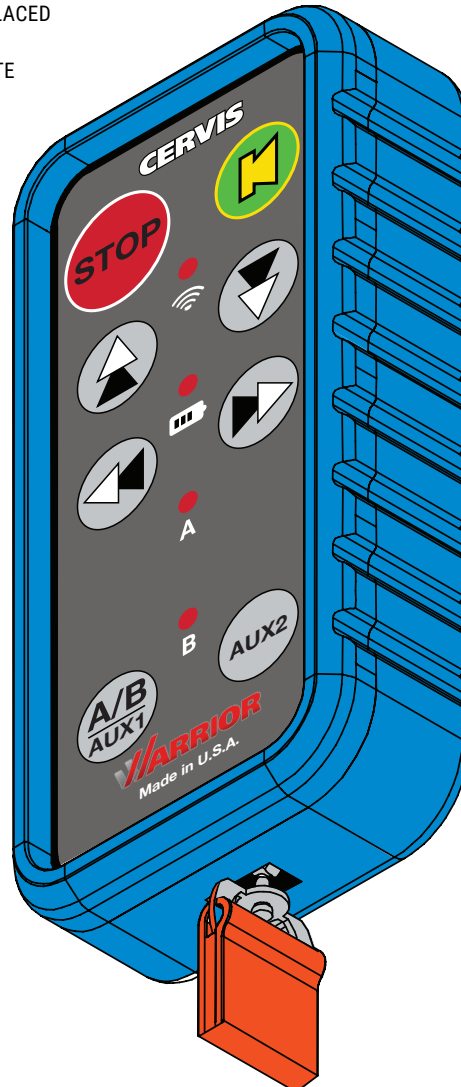

WARRIOR HH2S-9XW SERIES HANDHELD	WEIGHT G: 200 OZ: 7.2
HEIGHT MM: 136.38 IN: 5.37	LENGTH MM: 67.96 IN: 2.68
DEPTH MM: 28.42 IN: 0.92	