

PG-X10JS

SMART TRANSMITTERS

2.4GHz @ 100mW or 900MHz @ 10mW

Channel-Hopping DSSS ■ FCC & Industry Canada License-Free ■ Internal Antenna

■ POWER

VOLTAGE IN

+1.6 V TO +3.2 VDC

BATTERIES

FOUR "AA" CELL

BATTERY LIFE ≈ 100 HOURS

LOW VOLTAGE SHUTDOWN

+1.6 VDC

AUTO-SHUTDOWN

VARIABLE, TEN-MINUTE DEFAULT

■ ENVIRONMENT

OPERATING TEMPERATURE

-4°F TO 131°F (-20°C TO 55°C)

STORAGE TEMPERATURE

-40°F TO 131°F (-40°C TO 55°C)

HUMIDITY

0 TO 100%

■ CONTROLS

TOGGLES

FIVE: THREE-POSITION, CENTER-DETENT

PUSH-TO-OPERATE SWITCHES, MOMENTARY OR LATCH

TRIGGER

PROPORTIONAL CONTROLLER,

JOYSTICK ENABLE, OR DIGITAL

JOYSTICKS

ONE SINGLE OR DUAL-AXIS

STOP

ONE OVERSIZED TWO-POSITION MAINTAINED BUTTON

■ SERIAL COMMUNICATIONS (JS-xH10JS-UMB)

UMBILICAL CONNECTOR: TURCK 4-PIN,

KEYED WITH CHAIN-ATTACHED ALUMINUM CAP

■ LED INDICATORS


● TX: BLINKING – TRANSMITTING; NO SWITCH ACTIVE
SOLID – TRANSMITTING; SWITCH ACTIVE**● RX: BLINKING** – RECEIVING; NO OUTPUT OF INTEREST ACTIVE**● ERR: SOLID** – INDICATES ERROR WITH HANDHELD REMOTE
FLASHING – SWITCH CONFLICT;
SWITCH HELD BY USER WHEN TURNED ON**● BATT: FLASHING** – LOW BATTERY INDICATION

■ ENCLOSURE

DURABILITY

HIGH IMPACT POLYMER ENCLOSURE

ALUMINUM OR POLYCARBONATE FACEPLATE

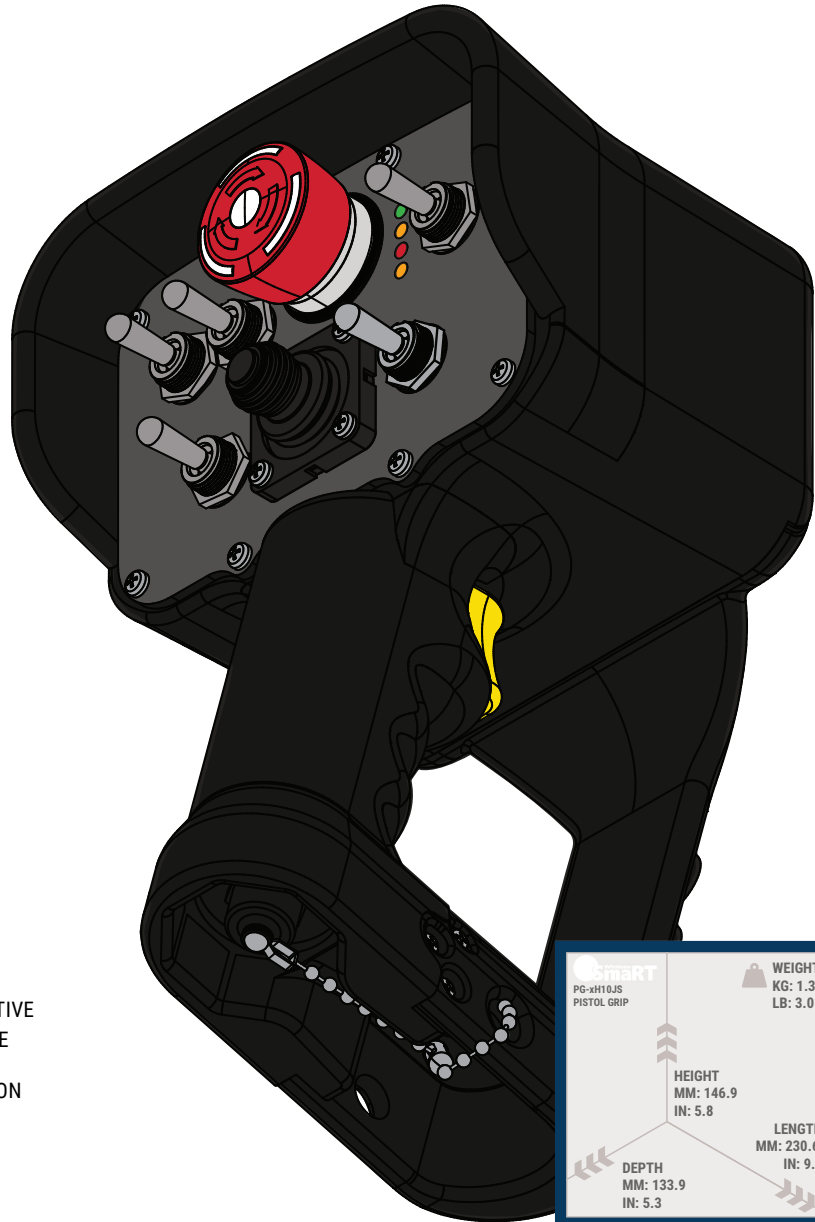

SMART		WEIGHT	
PG-xH10JS PISTOL GRIP		KG: 1.36 LB: 3.0	
HEIGHT		LENGTH	
MM: 146.9		MM: 230.6	
IN: 5.8		IN: 9.1	
DEPTH			
MM: 133.9			
IN: 5.3			