

## PG-X12JS / PG-X12JS-TFT

### SMART TRANSMITTERS

**2.4GHz @ 100mW or 900MHz @ 10mW**

Channel-Hopping DSSS ■ FCC &amp; Industry Canada License-Free ■ Internal Antenna

#### ■ POWER

**VOLTAGE IN**

+1.6 V TO +3.2 VDC

**BATTERIES**

FOUR "AA" CELL

BATTERY LIFE ≈ 100 HOURS

**LOW VOLTAGE SHUTDOWN**

+1.6 VDC

**AUTO-SHUTDOWN**

VARIABLE, TEN-MINUTE DEFAULT

#### ■ ENVIRONMENT

**OPERATING TEMPERATURE**

-4°F TO 131°F (-20°C TO 55°C)

**STORAGE TEMPERATURE**

-40°F TO 131°F (-40°C TO 55°C)

**HUMIDITY**

0 TO 100%

#### ■ CONTROLS

**TOGGLES**

THREE: THREE-POSITION, CENTER-DETENT

PUSH-TO-OPERATE SWITCHES, MOMENTARY OR LATCH

**TRIGGER**

PROPORTIONAL CONTROLLER,

JOYSTICK ENABLE, OR DIGITAL

**JOYSTICKS**

TWO SINGLE OR DUAL-AXIS

**STOP**

ONE OVERSIZED TWO-POSITION

MAINTAINED BUTTON

#### ■ LED INDICATORS


- **TX: BLINKING** – TRANSMITTING; NO SWITCH ACTIVE
- **SOLID** – TRANSMITTING; SWITCH ACTIVE
- **RX: BLINKING** – RECEIVING; NO OUTPUT OF INTEREST ACTIVE
- **ERR: SOLID** – INDICATES ERROR WITH HANDHELD REMOTE
- **FLASHING** – SWITCH CONFLICT;  
SWITCH HELD BY USER WHEN TURNED ON
- **BATT: FLASHING** – LOW BATTERY INDICATION

#### ■ ENCLOSURE

**DURABILITY**

HIGH IMPACT POLYMER ENCLOSURE

ALUMINUM OR POLYCARBONATE FACEPLATE

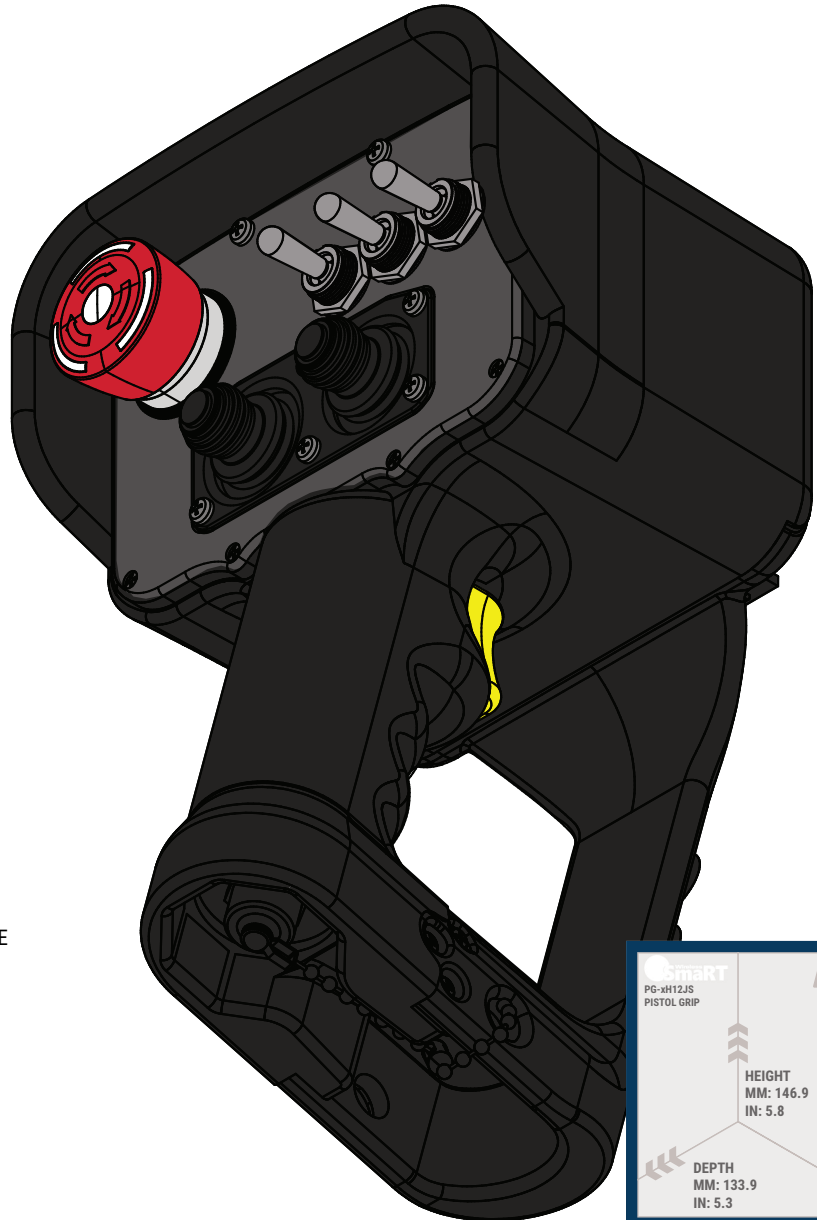

CERVIS PG-X12JS PISTOL GRIP		WEIGHT KG: 1.36 LB: 3.0
HEIGHT MM: 146.9 IN: 5.8		LENGTH MM: 230.6 IN: 9.1
DEPTH MM: 133.9 IN: 5.3		