

PG-X14 / PG-X14-DIS / PG-X14-LED

2.4GHz or 900MHz @ 100mW

SMART PISTOL GRIP TRANSMITTERS

Channel-Hopping DSSS ■ FCC & Industry Canada License-Free ■ Internal Antenna

POWER

VOLTAGE IN

+1.6 V TO +3.2 VDC

BATTERIES

FOUR "AA" CELL

BATTERY LIFE

PG-X14: >100 HOURS

PG-X14-OLED: SCREEN SAVER >70 HOURS

PG-X14-OLED: SCREEN ALWAYS ON >40 HOURS

LOW VOLTAGE SHUTDOWN

+1.6 VDC

AUTO-SHUTDOWN

VARIABLE, FOUR MINUTE DEFAULT

ENVIRONMENT

OPERATING TEMPERATURE

-4°F TO 131°F (-20°C TO 55°C)

STORAGE TEMPERATURE

-40°F TO 131°F (-40°C TO 55°C)

HUMIDITY

0 TO 100%

VIBRATION / SHOCK

IEC60068-2-6

10 HZ TO 150 HZ @ 1.0 G PEAK ACCELERATION

10.0 G PEAK SHOCK ACCELERATION

CONTROLS

TOGGLES

SEVEN: THREE-POSITION, RETURN-TO-CENTER, PUSH-TO-OPERATE OR LATCH

TRIGGER


PROPORTIONAL CONTROLLER, JOYSTICK ENABLE, OR DIGITAL OUTPUT

M-STOP

ONE MUSHROOM-STYLE
SPRING-LOADED TWO-POSITION

LED INDICATORS

- **TX: BLINKING:** TRANSMITTING, NO SWITCH ACTIVE
SOLID: TRANSMITTING, SWITCH ACTIVE
- **RX: BLINKING:** RECEIVING, NO OUTPUT OF INTEREST ACTIVE
SOLID: RECEIVING, OUTPUT OF INTEREST ACTIVE
- **ERR: SOLID:** INDICATES ERROR WITH HANDHELD REMOTE
FLASHING: SWITCH CONFLICT, SWITCH HELD BY USER WHEN TURNED ON
- **BATT: FLASHING:** LOW BATTERY INDICATION
- **MAIN SCREEN:** RSSI AND BATTERY LEVEL INDICATION

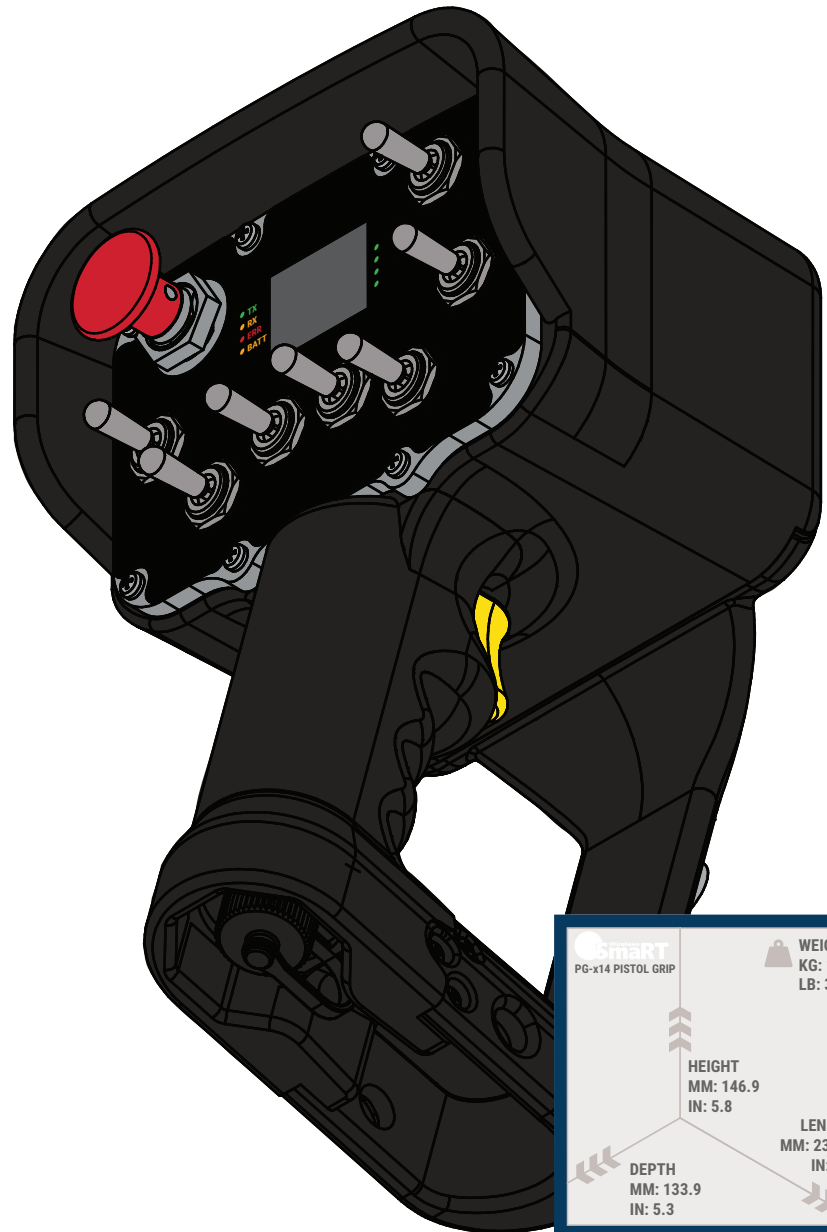

SMART PG-X14 PISTOL GRIP		WEIGHT KG: 1.36 LB: 3.0
HEIGHT MM: 146.9 IN: 5.8		LENGTH MM: 230.6 IN: 9.1
DEPTH MM: 133.9 IN: 5.3		